



**ALPHA & OMEGA**  
SEMICONDUCTOR

**AOCA32107E**

12V Common-Drain Dual N-Channel MOSFET

### General Description

- Trench Power MOSFET technology
- Low  $R_{SS(ON)}$
- With ESD protection to improve battery performance and safety
- Common drain configuration for design simplicity
- RoHS and Halogen-Free Compliant

### Applications

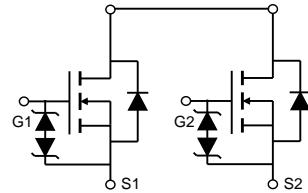
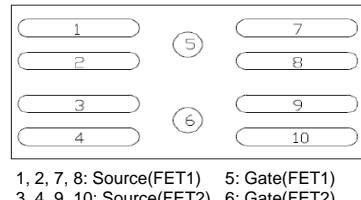
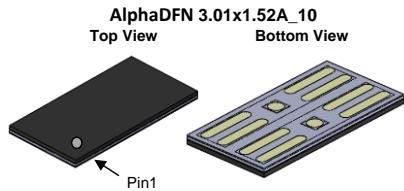
- Battery protection switch
- Mobile device battery charging and discharging

### Product Summary

$V_{SS}$	12V
$R_{SS(ON)}$ (at $V_{GS}=4.5V$ )	< 3.7mΩ
$R_{SS(ON)}$ (at $V_{GS}=4.0V$ )	< 3.8mΩ
$R_{SS(ON)}$ (at $V_{GS}=3.8V$ )	< 4mΩ
$R_{SS(ON)}$ (at $V_{GS}=3.1V$ )	< 4.6mΩ
$R_{SS(ON)}$ (at $V_{GS}=2.5V$ )	< 5.6mΩ

### Typical ESD protection

HBM Class 2



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOCA32107E	AlphaDFN 3.01x1.52A_10	Tape & Reel	8000

### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Rating	Units
Source-Source Voltage	$V_{SS}$	12	V
Gate-Source Voltage	$V_{GS}$	$\pm 8$	V
Source Current(DC) <sup>Note1</sup>	$I_S$   $T_A=25^\circ\text{C}$	22	A
Source Current(Pulse) <sup>Note2</sup>	$I_{SM}$	130	
Power Dissipation <sup>Note1</sup>	$P_D$   $T_A=25^\circ\text{C}$	2.3	W
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

### Thermal Characteristics

Parameter	Symbol	Typical	Units
Maximum Junction-to-Ambient	$t \leq 10\text{s}$	45	°C/W
Maximum Junction-to-Ambient	Steady-State	55	°C/W

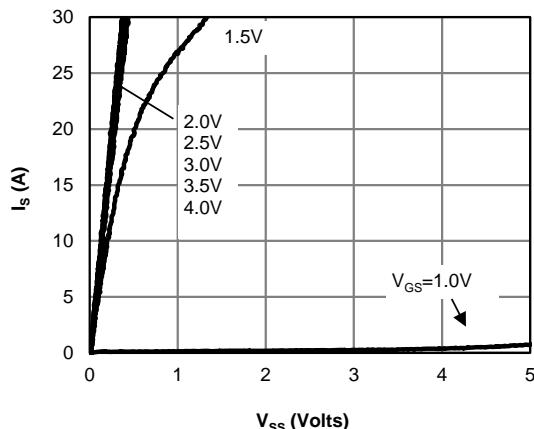
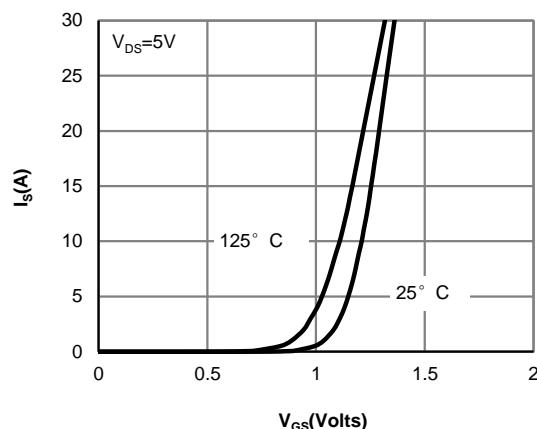
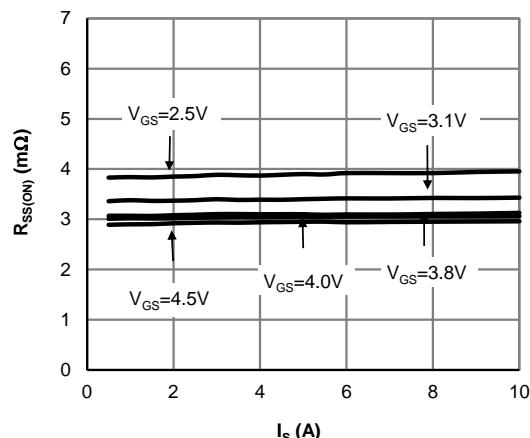
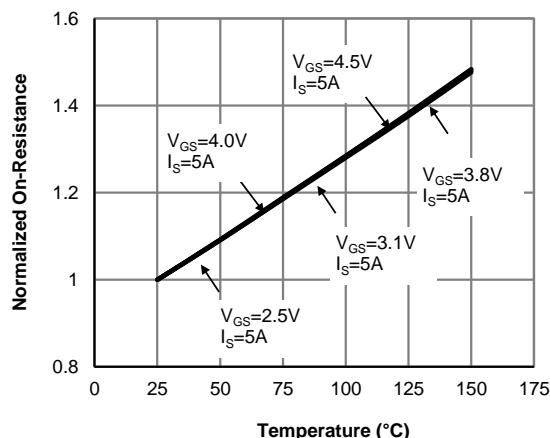
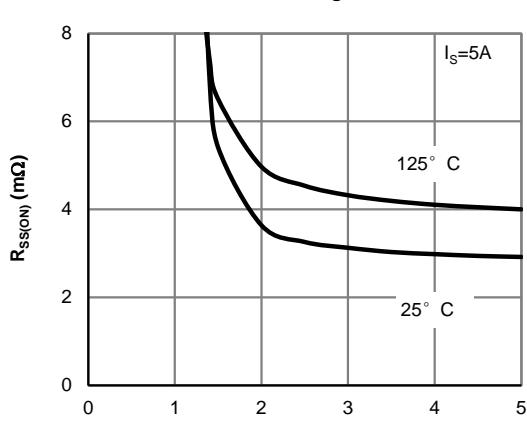
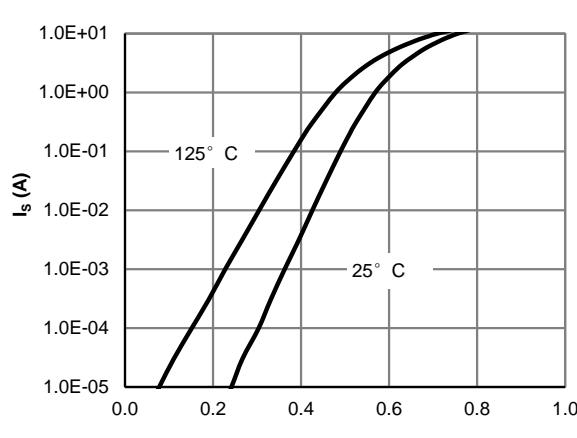
**Note 1.**  $I_S$  rated value is based on bare silicon. Mounted on 70mmx70mm FR-4 board.

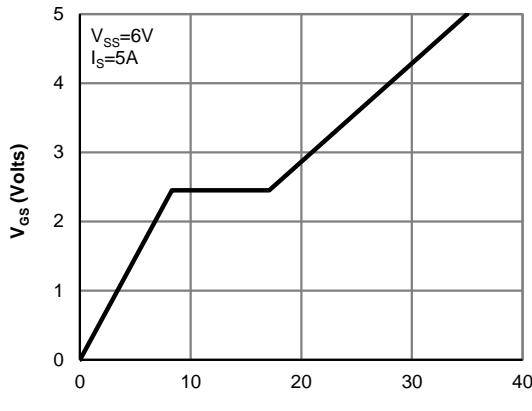
**Note 2.** PW <10  $\mu\text{s}$  pulses, duty cycle 1% max.

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

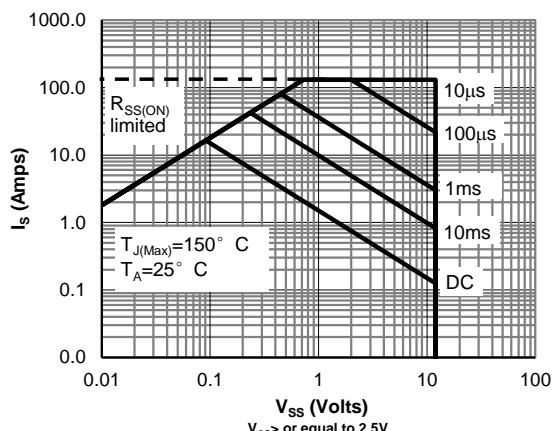
Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
BV <sub>SSS</sub>	Source-Source Breakdown Voltage	I <sub>S</sub> =250μA, V <sub>GS</sub> =0V	Test Circuit 6	12		V
I <sub>SSS</sub>	Zero Gate Voltage Source Current	V <sub>SS</sub> =12V, V <sub>GS</sub> =0V T <sub>J</sub> =55°C	Test Circuit 1		1 5	μA
I <sub>GSS</sub>	Gate leakage current	V <sub>SS</sub> =0V, V <sub>GS</sub> =±8V	Test Circuit 2		±10	μA
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>SS</sub> =V <sub>GS</sub> , I <sub>S</sub> =250μA	Test Circuit 3	0.4	0.7	1.1
R <sub>SS(ON)</sub>	Static Source to Source On-Resistance	V <sub>GS</sub> =4.5V, I <sub>S</sub> =5A T <sub>J</sub> =125°C	Test Circuit 4	2.1 2.9	2.95 4.05	3.7 5.0
		V <sub>GS</sub> =4.0V, I <sub>S</sub> =5A	Test Circuit 4	2.2	3.05	3.8
		V <sub>GS</sub> =3.8V, I <sub>S</sub> =5A	Test Circuit 4	2.3	3.1	4.0
		V <sub>GS</sub> =3.1V, I <sub>S</sub> =5A	Test Circuit 4	2.4	3.4	4.6
		V <sub>GS</sub> =2.5V, I <sub>S</sub> =5A	Test Circuit 4	2.8	3.9	5.6
g <sub>FS</sub>	Forward Transconductance	V <sub>SS</sub> =5V, I <sub>S</sub> =5A	Test Circuit 3		50	S
V <sub>FSS</sub>	Forward Source to Source Voltage	I <sub>S</sub> =1A, V <sub>GS</sub> =0V	Test Circuit 5		0.57	V
<b>DYNAMIC PARAMETERS</b>						
R <sub>g</sub>	Gate resistance	f=1MHz		1.2		KΩ
<b>SWITCHING PARAMETERS</b>						
Q <sub>g</sub>	Total Gate Charge	V <sub>G1S1</sub> =4.5V, V <sub>SS</sub> =6V, I <sub>S</sub> =5A		32		nC
t <sub>D(on)</sub>	Turn-On DelayTime	V <sub>G1S1</sub> =4.5V, V <sub>SS</sub> =6V, R <sub>L</sub> =1.2Ω, R <sub>GEN</sub> =3Ω Circuit8	Test	1.2		μs
t <sub>r</sub>	Turn-On Rise Time			3.0		μs
t <sub>D(off)</sub>	Turn-Off DelayTime			3.1		μs
t <sub>f</sub>	Turn-Off Fall Time			8.2		μs

APPLICATIONS OR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

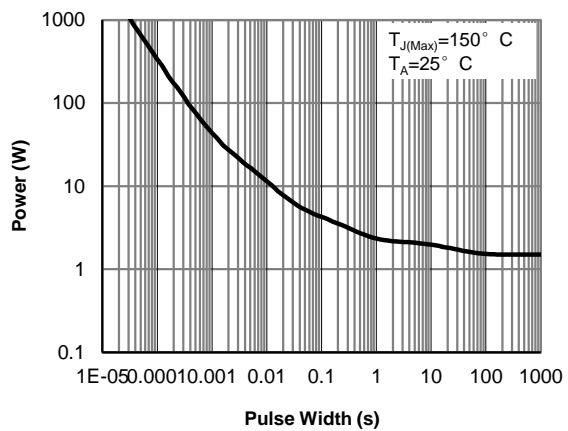
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 1: On-Region Characteristics**

**Figure 2: Transfer Characteristics**

**Figure 3: On-Resistance vs. Source Current and Gate Voltage**

**Figure 4: On-Resistance vs. Junction Temperature**

**Figure 5: On-Resistance vs. Gate-Source Voltage**

**Figure 6: Forward Source to Source Characteristics**

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


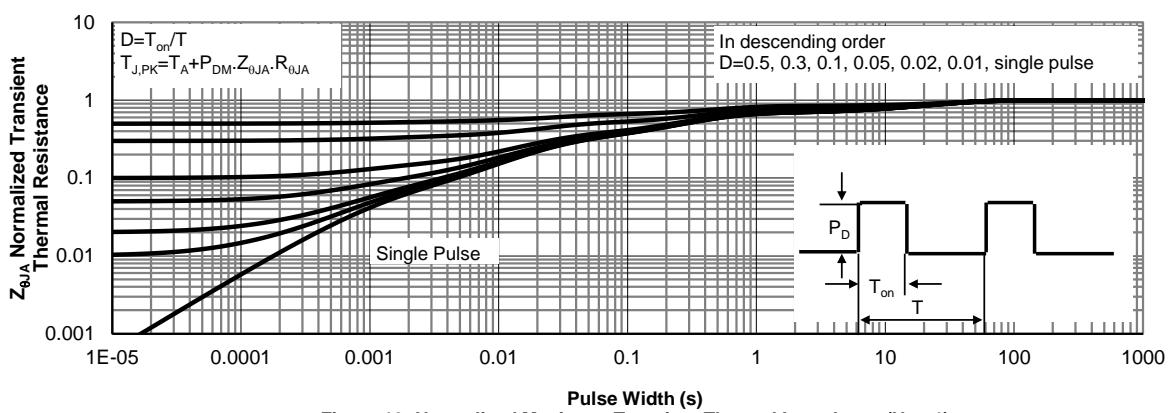
$V_{SS}=6V$   
 $I_S=5A$



$T_{J(\text{Max})}=150^\circ\text{ C}$   
 $T_A=25^\circ\text{ C}$   
 $V_{GS}>\text{ or equal to }2.5\text{ V}$

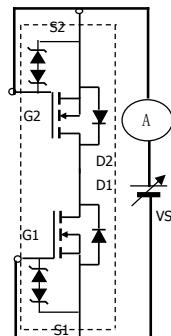
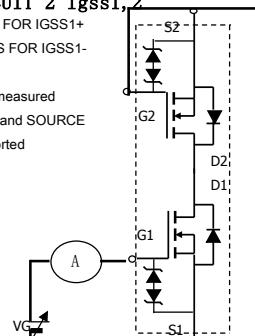
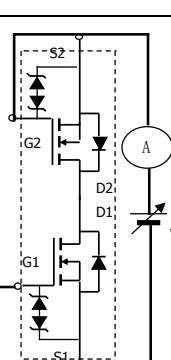
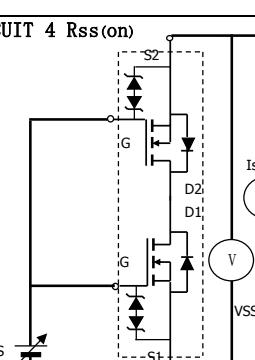
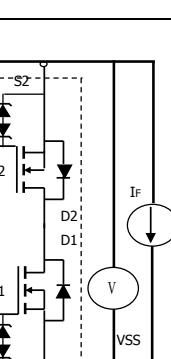
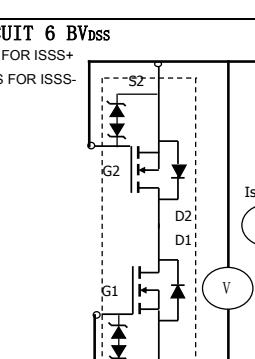
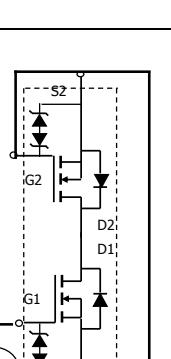


$T_{J(\text{Max})}=150^\circ\text{ C}$   
 $T_A=25^\circ\text{ C}$



$D=T_{on}/T$   
 $T_{J,PK}=T_A+P_{DM}Z_{θJA}R_{θJA}$

In descending order  
 $D=0.5, 0.3, 0.1, 0.05, 0.02, 0.01$ , single pulse

<b>TEST CIRCUIT 1 Isss</b> POSITIVE VSS FOR ISSS+ NEGATIVE VSS FOR ISSS- 	<b>TEST CIRCUIT 2 Igss1,2</b> POSITIVE VGS FOR IGSS1+ NEGATIVE VGS FOR IGSS1- <p>When FET1 is measured between GATE and SOURCE of FET2 are shorted</p> 
<b>TEST CIRCUIT 3 Vgs(off)</b> <p>When FET1 is measured between GATE and SOURCE of FET2 are shorted</p> 	<b>TEST CIRCUIT 4 Rss(on)</b> 
<b>TEST CIRCUIT 5 VF(ss)1,2</b> <p>When FET1 measured FET2 VGS=4.5V</p> 	<b>TEST CIRCUIT 6 BVdss</b> POSITIVE VSS FOR ISSS+ NEGATIVE VSS FOR ISSS- 
<b>TEST CIRCUIT 7 BVgs01,2</b> POSITIVE VSS FOR ISSS+ NEGATIVE VSS FOR ISSS- <p>When FET1 is measured between GATE and SOURCE of FET2 are shorted</p> 	<b>TEST CIRCUIT 8 Switching time</b> 